

FLOOR STANDING

- Stylish design & powerful air flow
- The control panel/remote controller have nanoe™ X displays
- Compact 34,100 Btu ODU (210 mm shorter/27 kg lighter than current model)




Capacity (Btu/h)	24,600	34,100	42,700	47,750	
Power Source	V/Phase Hz				
Indoor	S-24PB3Q6	S-34PB3Q6	S-43PB3Q6	S-48PB3Q6	
Outdoor	U-24PRB1Q6	U-34PSB3Q6	U-43PSB3Q6	U-48PSB3Q6	
Cooling Capacity: Rated (Min-Max)	kW	7.25 (1.00-7.50)	10.00 (1.20-10.30)	12.53 (2.00-13.50)	14.00 (2.00-14.60)
	Btu/h	24,600 (3,410-25,570)	34,100 (4,090-35,120)	42,700 (6,820-46,030)	47,750 (6,820-49,780)
Current: Rated (Max)	A	11.2 (13.7)	15.1 (16.9)	20.3 (26.9)	25.6 (28.1)
Cooling Power Input: Rated (Min-Max)	kW	2.55 (0.21-2.80)	3.45 (0.30-3.60)	4.47 (0.80-5.00)	5.60 (0.80-5.70)
CSPF		4.05	4.06	4.06	4.06
Cooling Rated COP/EER	W/W	2.84	2.89	2.80	2.50
	Btu/hW	9.64	9.88	9.55	8.52
Indoor Unit					
Cooling Air Volume	m³/min	15.5	32.0	32.0	32.0
	cfm	547	1,130	1,130	1,130
Sound Pressure Level (Hi/Lo)	dB (A)	45 / 33	53 / 44	53 / 44	53 / 44
Sound Power Level (Hi/Lo)	dB (A)	58 / 46	66 / 57	66 / 57	66 / 57
Dimension	Indoor (HxWxD)	mm	1,680 x 500 x 318	1,880 x 600 x 357	1,880 x 600 x 357
Net Weight	Indoor	kg	29.5	45.0	45.0
Outdoor					
Sound Pressure Level	dB (A)	54	54	55	56
Sound Power Level	dB (A)	67	67	68	69
Dimension Outdoor (HxWxD)	mm	626 x 825 x 320	786 x 900 x 320	996 x 940 x 340	996 x 940 x 340
Net Weight	kg	36.0	45.0	74.0	74.0
Piping Connection	Gas Pipe	mm (inch)	15.88 (5/8)	15.88 (5/8)	15.88 (5/8)
	Liquid Pipe	mm (inch)	6.35 (1/4)	6.35 (1/4)	6.35 (1/4)
Pipe Length	Min-Max	m	3 - 40	7.5 - 50	7.5 - 50
Elevation Difference (Outdoor unit upper)	m	20	20	30	30
Maximum Chargeless Length Max	m	15	20	20	20
Additional Gas	g/m	10	40	50	50
Operation Range, Outdoor	Min-Max	°C	18-43	18-43	18-43

* Specifications are subject to change without notice. Please refer to technical documents for more details.
 * The sound pressure level is measured in accordance with JIS C 9 612 and JIS B 8616.

Clean airflow direction control with remote controller

Easily swing the louvre at the touch of a button.

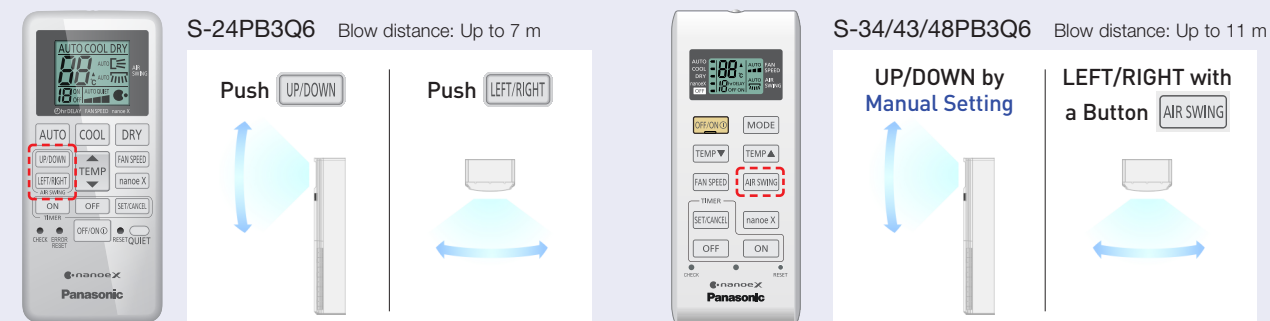

Other Functions

Random auto restart

During a power failure, when power is restored, it automatically restarts operating in the same mode as just before power was lost.

Auto fan mode

When the auto fan mode is set, the indoor unit of the air conditioner automatically is adjusted the suitable fan speed according to factors such as load.

12-hour On/Off delay setting timer

Pressing the timer button on the remote control lets you set operation start/stop time within 12 hours of the current time.




* The images above show the remote controller screen display.

Product Lineup

- All new models equipped with nanoe™ X Generator Mark 2 as standard
- Little installation work required, easy to clean
- Adjustable airflow direction provides a comfortable space for all

Type	Btu/h	24,600	34,100	42,700	47,750
Refrigerant		R32	R32	R410A	R410A
Floor standing		S-24PB3Q6			
Floor standing			S-34PB3Q6	S-43PB3Q6	S-48PB3Q6
Outdoor		U-24PRB1Q6	U-34PSB3Q6	U-43PSB3Q6	U-48PSB3Q6

FLOOR STANDINGS **NEW** Dimensions

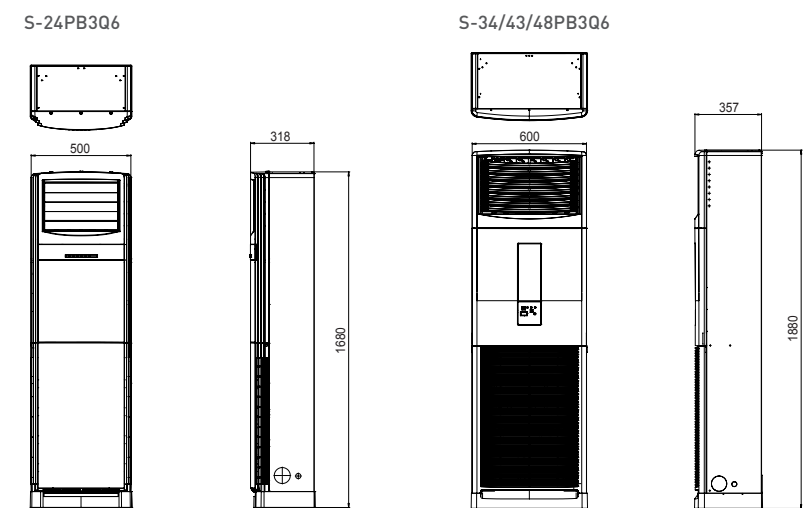

OUTDOOR UNITS **NEW** Dimensions

